



06/21/2021

City of Lake Forest Park
Planning Department
17425 Ballinger Way NE
Lake Forest Park, WA 98155

Re: AT&T's Radio Frequency (RF) Engineering Justification for the Proposed Wireless Communications Facility in City of Lake Forest Park: [SA1389 Lake Forest Relo at 19701 47th Ave NE, Lake Forest Park, WA 98155

To Whom It May Concern,

Enclosed please find the RF Justification document prepared for AT&T's proposed new wireless communications facility at the above noted location. This letter serves as my verification, to the best of my knowledge, of the accuracy of the RF information, propagation maps, and analysis provided in the attached RF Justification.

Thank you for your consideration of this information.

Sincerely,

Kung-Liang Brian Lin
RF Engineer
AT&T Mobility

A handwritten signature in black ink, appearing to read "Kung-Liang Brian Lin".



Date: June 16, 2021
Site Number: SA1389 – LAKE FOREST PARK
FA Code: 14948135
USID: 291229
Address: 19701 47th Avenue Northeast, Lake Forest Park, WA 98155
Re: Radio Frequency Compliance

Statement of Compliance

This AT&T wireless communications facility complies with all federal standards for radio frequency radiation in accordance with the Telecommunications Act of 1996 and subsequent amendments and any other requirements imposed by state or federal regulatory agencies.

Description of Facility:

Location Type: Proposed wireless communications facility will be comprised of multiple panel antennas and associated radio cabinets utilizing licensed frequencies in the 700, 850, 1900, 2100, and 2300 MHz bands. The purpose of the facility is to provide coverage and/or capacity to the geographic service area.

Power Density:

The power density from any sector as designed with the proposed facility shall not exceed the FCC maximum permissible exposure limits in accordance with FCC Public Standards OET Bulletin 65 (e.g., 1 mW/cm² at 1900 MHz) at any location that is considered generally accessible by the general public.

The proposed facility should not interfere with other communications facilities. Our sites are monitored 24/7 by a national operations center to insure all is operating normally. In addition, we have local technicians who make routine visits to cell sites to make repairs when needed. AT&T audits our facilities on a semi-annual basis to ensure that FCC compliance levels are continuously met.

If requested, a detailed radio frequency emission safety report detailing the maximum potential exposures will be provided to the jurisdiction.

Sincerely,

A handwritten signature in black ink, appearing to read "Juvylyn Calces".

Juvylyn Calces
AT&T Mobility - RAN Engineering



at&t

**SA1389 Lake Forest Relo
RF Justification**

SERVICE OBJECTIVES & TARGETED SERVICE AREA

AT&T is proposing to build a new wireless communication facility (“WCF” and/or “Facility SA1389 Lake Forest Relo, at 19701 47th Ave NE in the City of Lake Forest Park.

Service Objectives—Generally

AT&T strives for a network design that provides high radio frequency (“RF”) signal strength and signal-to-interference-plus-noise ratio (“SINR”) resulting in quality service inside buildings and vehicles. To support this network design there are two main drivers that prompt the need for a new cell site—coverage and capacity.

“Coverage” is the need to expand wireless service into an area that either has no service or bad service. “Capacity” is the need for more wireless resources. Cell sites have a limited number of resources to handle voice calls, data connections, and data volume. When these capacity limits are reached, user experience quickly degrades. Capacity issues for LTE networks are identified by using SINR metrics to measure the network’s signal quality when there is a high traffic load condition. High traffic areas in the network experience poor SINR due to the increased amount of signal noise/interference generated by the interfering strength of the simultaneous transmissions.

Service Objectives—Proposed New Facility

The proposed new Facility is a service coverage site. Currently, portions in and around Lake Forest Reservoir residential neighborhoods have minimal to no 4G voice service and AT&T’s existing coverage in the area is at or near its capacity and is insufficient for the volume of traffic (*i.e.* though this area already has AT&T coverage, additional capacity is needed to service the volume of users).

This objective of this proposed WCF is both maintain the coverage of the relocation site and improve the coverage to the town center and improve coverage in the surrounding areas. This service objective and Targeted Service Area was determined by AT&T’s RF engineers through a combined analysis of market demand, customer complaints, service requests, and RF engineering design (including SINR metrics).

The proposed new Facility meets AT&T’s service objectives to provide sufficient continuous and uninterrupted outdoor, in-vehicle, and in-building wireless service within the Targeted Service Area, resulting in fewer dropped calls, improved call quality, and improved access to additional wireless services the public now demands (this includes emergency 911 calls).



SEARCH RING


AT&T's RF engineers performed an RF engineering study—considering multiple objectives—to determine the approximate site location and antenna height required to best fulfill the noted service objectives within the Targeted Service Area. From this study, AT&T's RF engineers identified a “search ring” area where a new wireless facility may be located to provide effective service in the Targeted Service Area.

As this is a service coverage site intended to provide service in a specific area, the proposed new Facility must be located within the identified search ring to be able to establish a dominant signal within the Targeted Service Area—i.e. the proposed new Facility will provide service to users' handsets and prevent them from communicating with AT&T's existing facility, thereby relieving some of the burden on the existing facility by offloading users' data requirements to the proposed new Facility.

Figure A—Targeted Search Ring, below, indicates the search ring AT&T's RF engineers established for this proposed site. A discussion of the methodology AT&T's RF engineers used to identify the search ring is included at the end of this RF Justification document.



Figure A—Targeted Search Ring

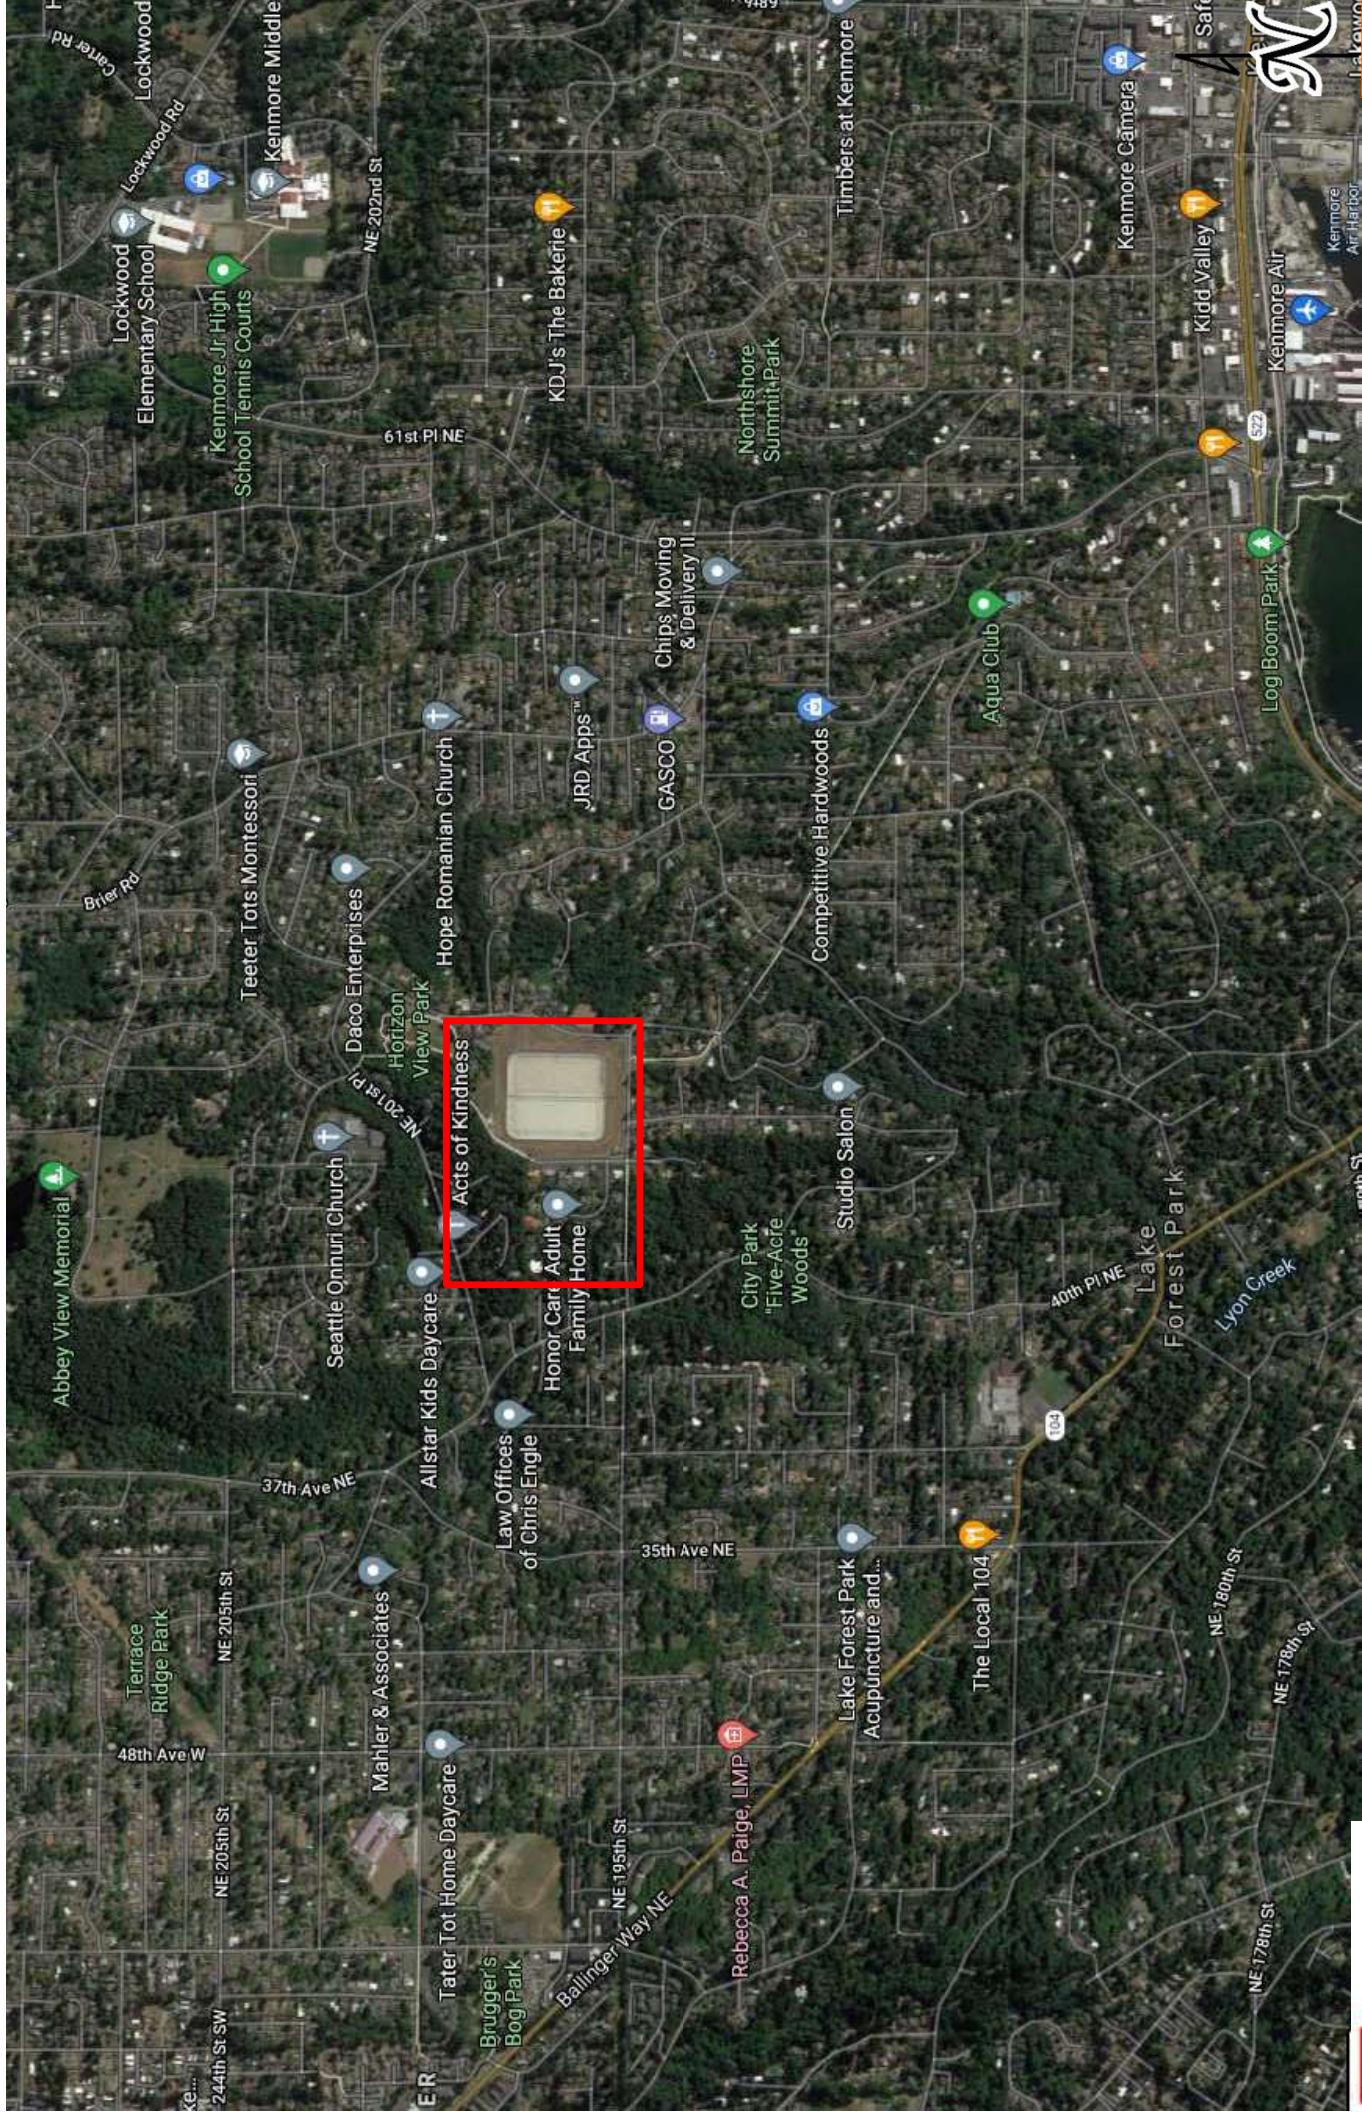

Search Ring

PROPOSED NEW AT&T FACILITY

Antennas and Equipment

To meet AT&T's service objectives within the Targeted Service Area, AT&T is proposing to install up to twelve (12) eight foot (8ft) panel antennas and twelve (12) remote radio head (RRH) units, together with all associated equipment with an 70ft antenna tip height.

Required Height

As the proposed new Facility is intended to provide new coverage and enhance existing capacity, height and location play an important role. The proposed antenna tip height was determined by considering various factors such as the height of surrounding wireless sites, ground elevation, obstructions to the signal, and the surrounding terrain. Accordingly, the proposed 70ft antenna tip height is the minimum necessary to best meet AT&T's service objectives within the Targeted Service Area. A lower antenna tip height at this location would not provide as effective capacity improvement within the Targeted Service. The proposed antenna tip height is also the height where an AT&T wireless device can be reliably used to make and receive telephone calls and use data service in the presence of varying signals.

Projected New Coverage


Based upon the above proposed equipment and antenna tip height, AT&T's RF engineers project that the proposed Facility will provide the following new AT&T coverage.

Figure B—Existing AT&T Coverage shows existing AT&T wireless services in the general area of the proposed new site, which demonstrates the current gap in coverage in the targeted service area. The red star indicates the location of the proposed new WCF. The pink diamond indicates the location of existing AT&T WCF sites; coverage from AT&T's existing WCF sites is shaded in green. As can be seen, there is a coverage gap in all areas not shaded in green. Currently, the target coverage area has minimal to no 4G voice service and does not have adequate 4G LTE service.

Figure C—Projected New AT&T Coverage identifies the projected coverage from the proposed new WCF with the requested antenna tip height of 70 ft. The proposed antenna tip height is the minimum necessary to help fill the coverage gap relative to nearby complementary wireless facilities and to support the FirstNet Network. This is also the height where an AT&T wireless device can be reliably used to make and receive telephone calls and use data service in the presence of varying signals.




Figure B—Existing AT&T Coverage Targeted Service Area BEFORE Addition of P

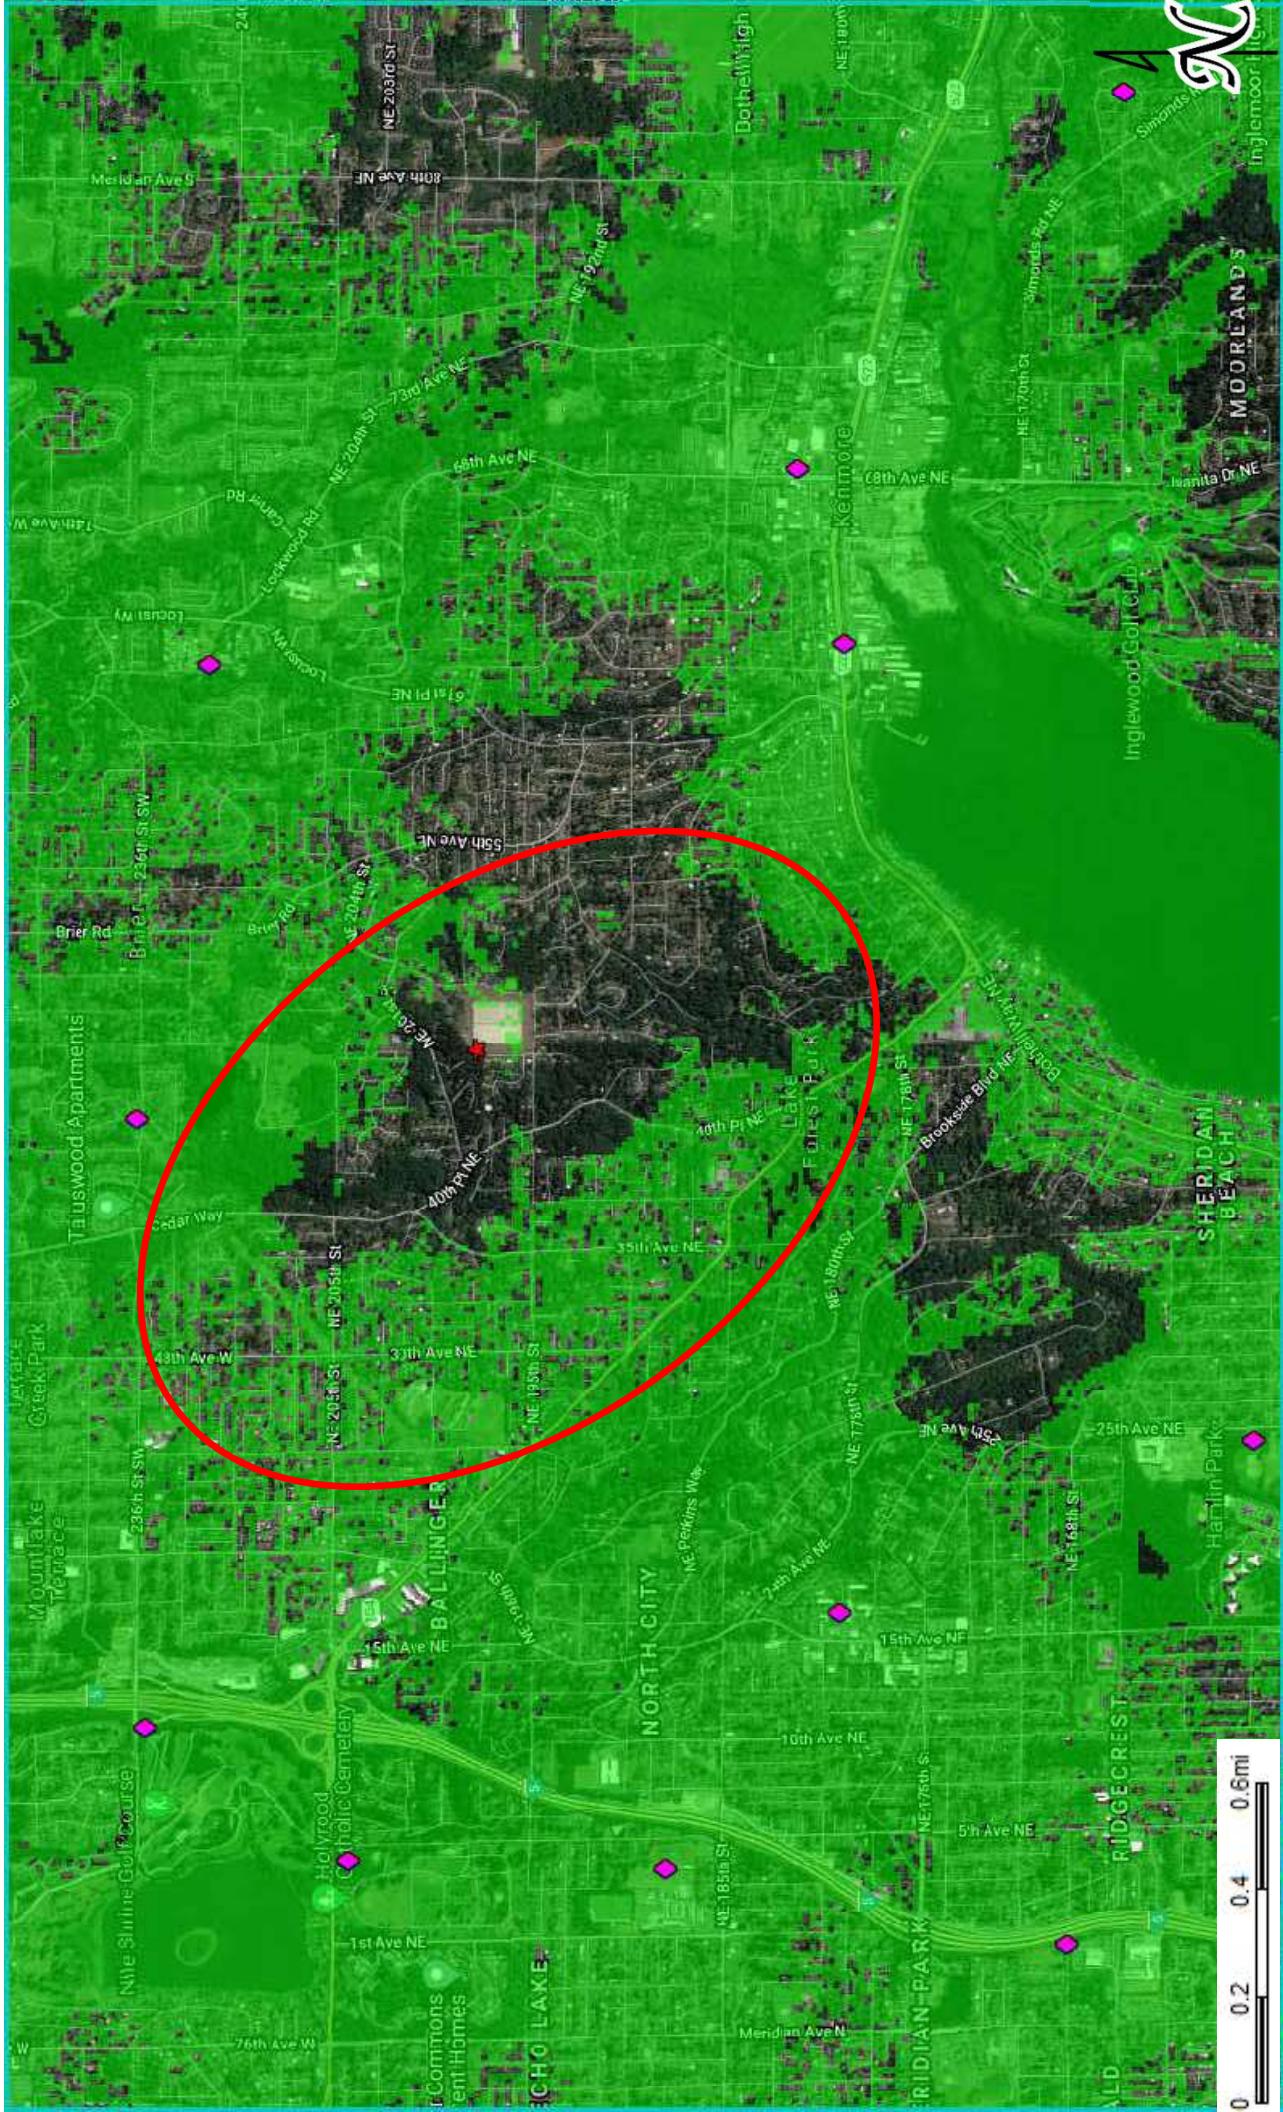

- ◆ Existing AT&T Site Location
- ★ Proposed New AT&T Site Location
- Existing AT&T Coverage
- Target Area to Cover

**Figure C—Projected New AT&T Coverage
Coverage AFTER Proposed AT&T Facility On-Air—70ft Antenna Tip Height**

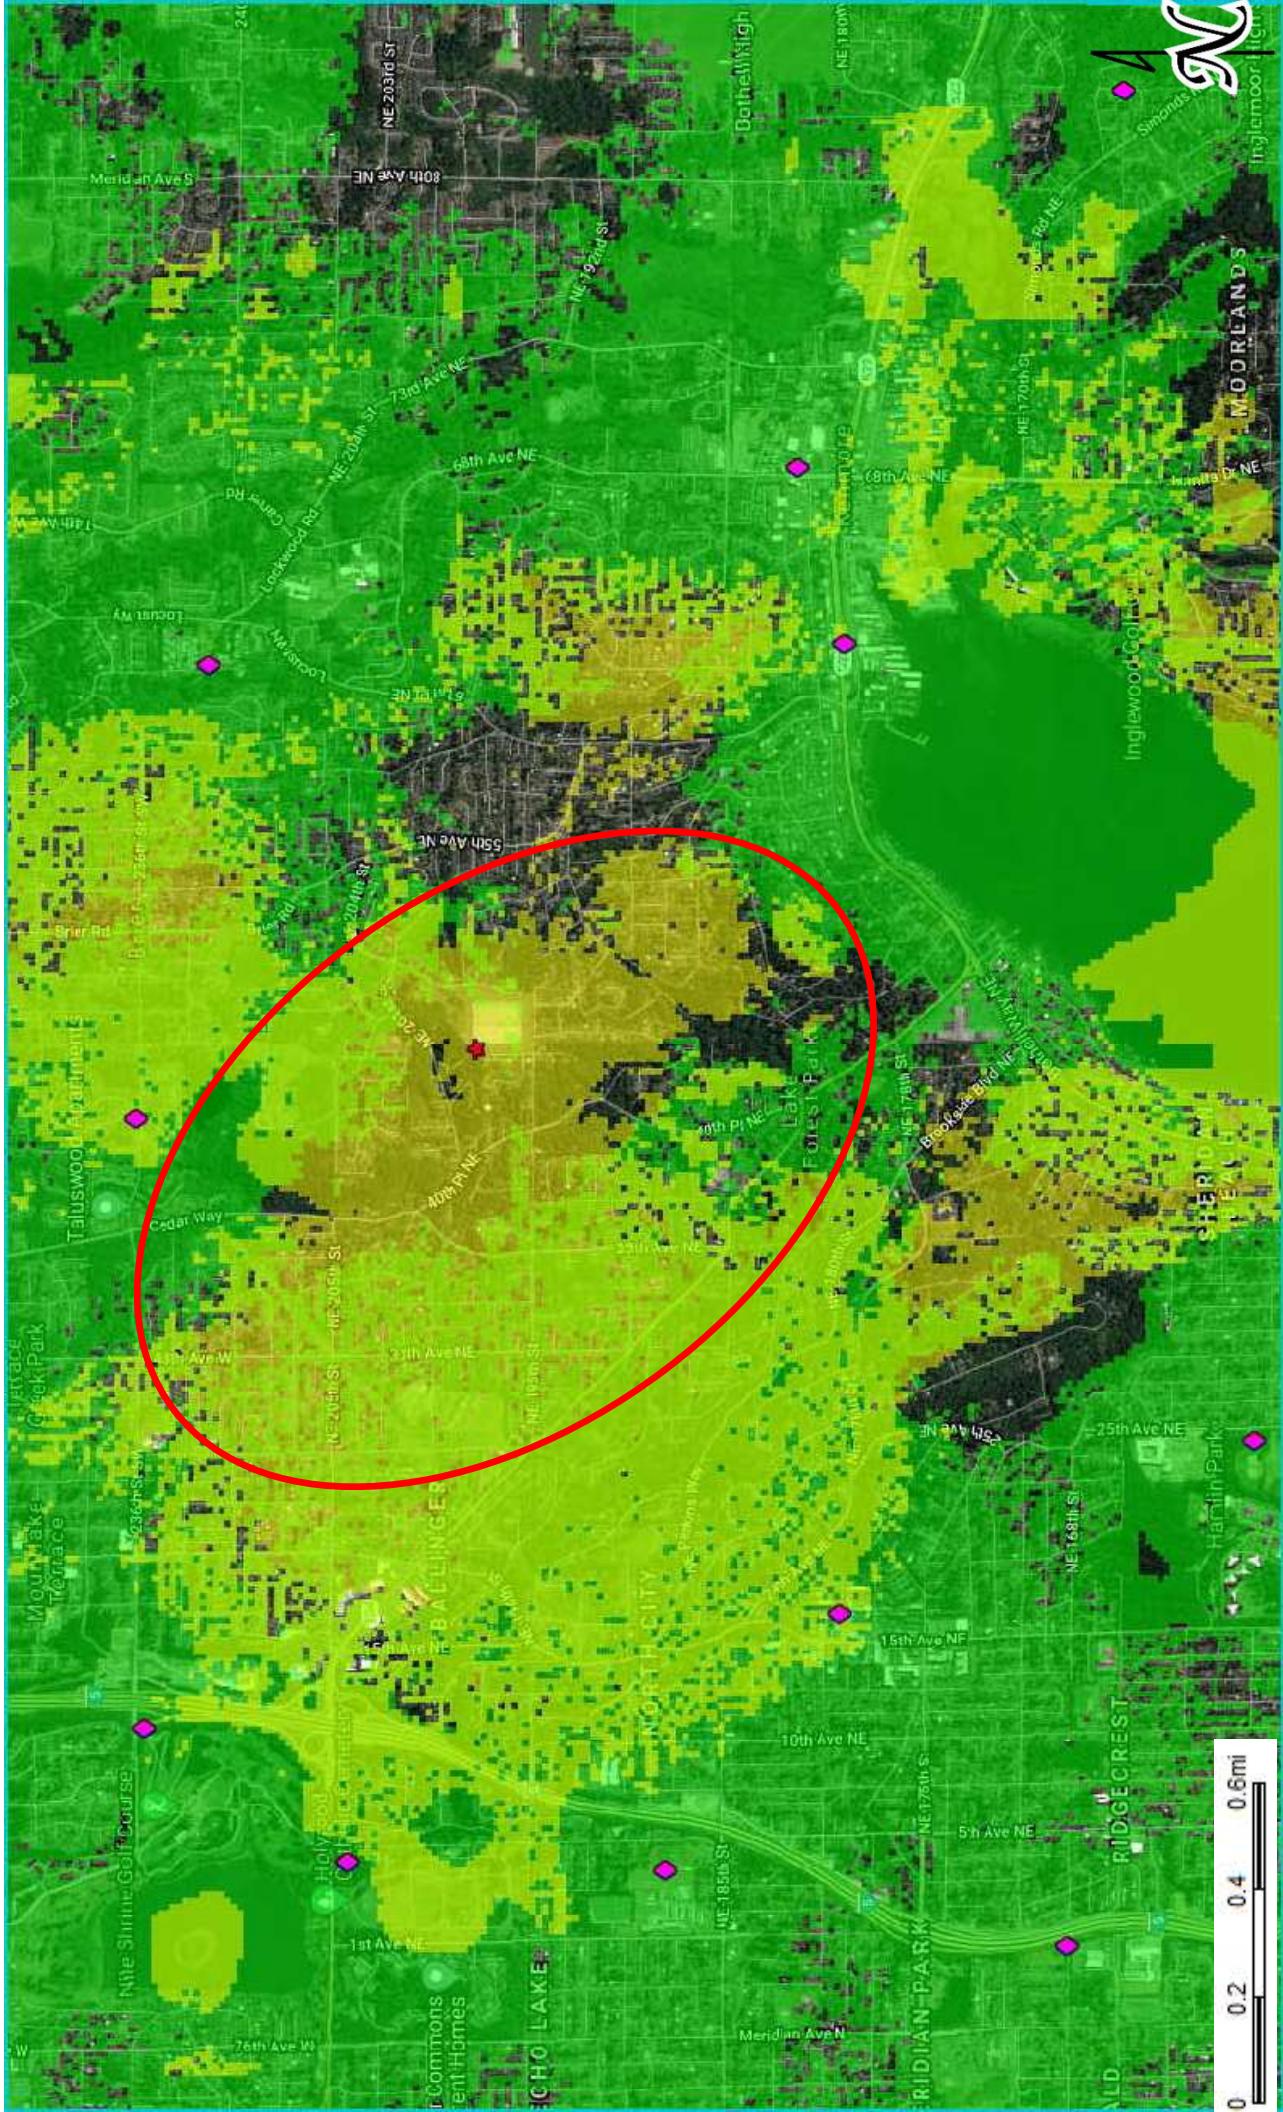

- ◆ Existing AT&T Site Location
- ★ Proposed New AT&T Site Location
- Existing AT&T Coverage
- Proposed New AT&T Coverage
- Target Area to Cover

Alternative Site Analysis

There are no Alternative Locations

Search Ring Methodology

AT&T's RF engineers used coverage propagation software systems to predict the coverage provided by the proposed new WCF. The software and AT&T's RF engineers considered the general factors outlined below, as well as more project-specific factors such as the type of antenna, antenna tilt, etc.

Coverage. The antenna site must be located in an area where the radio frequency broadcasts will provide adequate coverage within the targeted service area. The RF engineer must take into consideration the coverage objectives for the site as well as the terrain in and around the area to be covered. Because radio frequency broadcasts travel in a straight line and diminish as they travel further away from the antennas, it is generally best to place an antenna site near the center of the desired coverage area. However, in certain cases, the search ring may be located away from the center of the desired coverage area due to the existing coverage, the surrounding terrain, or other features which might affect the radio frequency broadcasts, e.g. buildings or sources of electrical interference.

Clutter. AT&T's WCFs must "clear the clutter"—the WCF site must be installed above or close to RF obstructions (the "clutter") to enable the RF to extend beyond and clear the clutter. AT&T's radio frequencies do not penetrate mountains, hills, rocks, or metal, and are diminished by trees, brick and wood walls, and other structures. Accordingly, AT&T's antennas must be installed above or close to the "clutter" to provide high quality communications services in the desired coverage areas. Additionally, if the local code requires us to accommodate additional carriers on the support structure, the structure must be even taller to also allow the other carriers' antennas to clear the clutter.

Call Handoff. The WCF site must be in an area where the radio broadcasts from the site will allow seamless "call handoff" with adjacent WCF sites. Call handoff is a feature of a wireless communications system that allows an ongoing telephone conversation to continue uninterrupted as the user travels from the coverage area of one antenna site into the coverage area of an adjacent antenna site. This requires coverage overlap for a sufficient distance and/or period of time to support the mechanism of the call handoff.

Quality of Service. Users of wireless communications services want to use their services where they live, work, commute and play, including when they are indoors. AT&T's coverage objectives include the ability to provide indoor coverage in areas where there are residences, businesses and indoor recreational facilities.



Search Ring Methodology—Con't

Radio Frequencies used by System. The designs of wireless communications systems vary greatly based upon the radio frequencies that are used by the carrier. If the carrier uses radio frequencies in the 850 MHz to 950 MHz range, the radio signals will travel further and will penetrate buildings better than the radio frequencies in the 1900 MHz band. As a result, wireless communications systems that use lower radio frequencies will need fewer sites than wireless communications systems that use higher radio frequencies. AT&T's system uses only frequencies in the 1900 MHz so AT&T's system requires more sites in order to achieve the same coverage that is provided by the carriers which use the 850 MHz to 950 MHz frequency band.

Land Use Classifications. A&T's ability to construct a WCF site on any particular property is affected by state and local regulations, including zoning and comprehensive plan classifications, goals, and policies. AT&T's search rings take these laws and regulations into consideration.

